

ENROLLADORES CINTA DE SEGURIDAD



**ADVANCED FLUID
MANAGEMENT SOLUTIONS**





**ADVANCED FLUID
MANAGEMENT SOLUTIONS**



DESIGN IS

Art





**ADVANCED FLUID
MANAGEMENT SOLUTIONS**

WARNING TAPE REEL LIZARD

✓ STRENGTH POINTS

- AISI 304 stainless steel automatic hose guide suitable for potential corrosive atmospheres.
- Repeated spring stress-tests guarantee decades of life and efficiency.
- Speed control rewinding brake is available as accessory with specific P/N.
- Carabiner hook in aluminum as standard with the selected tape.
- White-red and yellow-black tapes available.
- Stopping pawl easy to remove for maintenance or when the work requires free sliding.
- Anti-shook technopolymer protecting cover.
- Fixing bracket that can be rotated up to 90° per side and with 2 slotted holes for safe, easy installation. The bracket can be locked in place with a screw, making the cable reel fixed.

TECHNICAL CHARACTERISTICS

TAPE GUIDE

in AISI 304 stainless steel

STOPPING PAWL

easy to remove for maintenance or when the work requires free sliding.

DELIMITATION TAPE

White-red and yellow-black tapes available.

CARABINER HOOK

in aluminum.

SPRING


Tested to withstand over 20000 work cycles.

FIXING BRACKET

Can be rotated up to 90° per side and has 2 slotted holes for safe, easy installation.

BAYONET BRACKET


Lets you quickly move the hose tape around the various workstations.

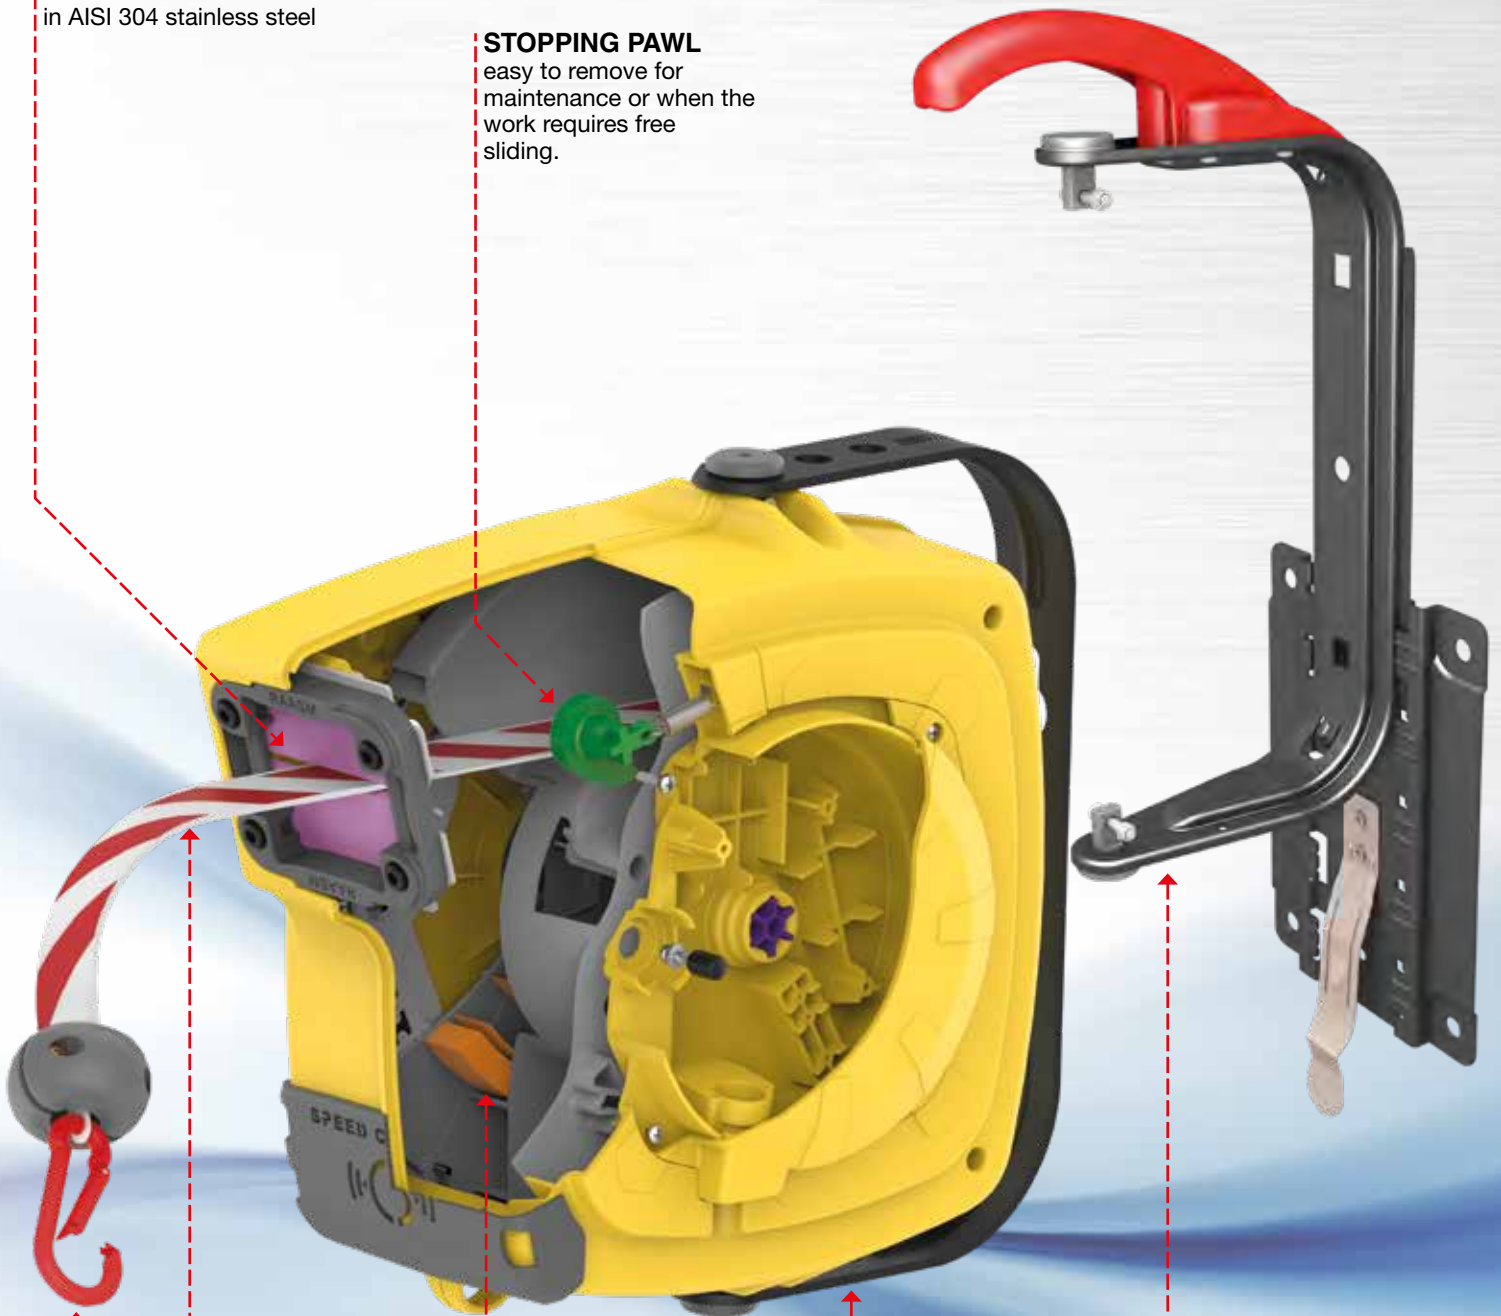



WARNING TAPE REEL "LIZARD" IN TECHNOPOLYMER S. 280

RAASM warning tape reels are the ideal solution for all those situations where it's necessary or mandatory to delimit the dangerous working areas both for the operators and the external people. There are many applications examples: fuel loading on tanks in service stations or goods and luggage unloading in airport. The warning tape reel is designed to satisfy the main RAASM quality characteristics in terms of structure and durability.



max temperature 70 °C



**FIXED AND
SWIVELLING**

COVER COLORS

Shockproof plastic

STANDARD

RAL 1004

Overall dimensions without bayonet bracket (mm)	Overall dimensions with bayonet bracket (mm)	Packaging (mm) W x D x H	
			440 x 195 x 485
			No. 40 packages per pallet

(W: width - D: depth - H: height)



P/N	Tape color	Length	Weight
6154	White - Red	16 m	5,7 kg
6155	Yellow - Black	16 m	5,7 kg


Overall dimensions of the delimitation tape	Width	Thickness	Length
	40 mm	1,5 mm	16 m



SPEED CONTROL

The versions listed below come with clutch so that tape rewinding can be performed at a controlled speed. They are marked by the **SPEED CONTROL** dataplate.

P/N	Tape color	Length	Weight
6156	White - Red	16 m	6,1 kg
6157	Yellow - Black	16 m	6,1 kg

Overall dimensions of the delimitation tape	Width	Thickness	Length
	40 mm	1,5 mm	16 m

RELATED ITEMS



P/N	Type of cable	Cable length
6158	1 x 6 - PUR	14,5 m
6159	1 x 6 - PUR	14,5 m



P/N	Type of cable	Cable length
4701	1 x 6 - PUR	14,5 m
4702	1 x 6 - PUR	26 m

ACCESSORY FOR WARNING TAPE REEL

P/N **6153**
Bayonet bracket, lets you easily move the tape reel within the various workstations.



EXAMPLES OF WARNING TAPE REEL WITH ACCESSORIES





TECNOLOGÍA

La investigación y el desarrollo de nuevas soluciones que acabarán convirtiéndose en productos de vanguardia de la más alta calidad totalmente fabricados en Italia, es el principal punto de partida de todo el ciclo de producción



CALIDAD

Desde siempre, la calidad es una preocupación básica en la creación de productos **RAASM**. Para obtenerla es indispensable la ejecución de un sinfín de pruebas altamente exigentes y rigurosas



FUNCIONABILIDAD

RAASM dispone de la más completa gama de productos para lubricación y distribución de fluidos. El objetivo es el de dar siempre una respuesta satisfactoria a las demandas de nuestros clientes y cubrir sus exigencias



Company with an
ISO 9001:2015
certified quality
management system

RAASM S.p.A.
36022 S. ZENO DI CASSOLA (VI)
Via Marangoni, 33 - ITALY



GESTIÓN INTEGRAL DE EQUIPAMIENTOS INDUSTRIALES / INTEGRAL MANAGEMENT FOR INDUSTRIAL EQUIPMENTS

C/Candás, 20 Bajo - 33207 Gijón - Asturias - España
Tel. (+34) 984 05 00 90
gesfluid@gesfluid.es - www.gesfluid.es